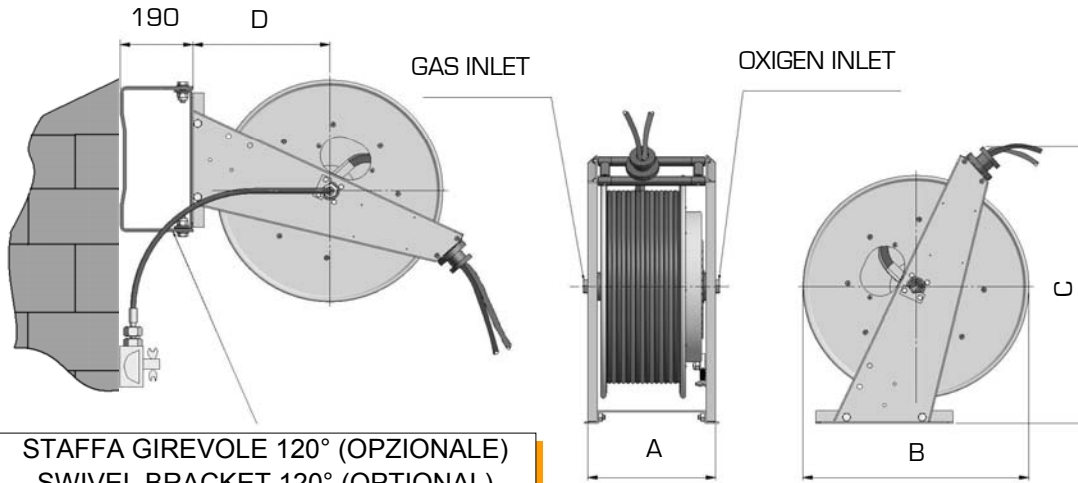


141.1

**STAFFA GIREVOLE 120° (OPZIONALE)
SWIVEL BRACKET 120° (OPTIONAL)**

MODELLO MODEL	PRESSIONE MAX MAX PRESSURE	A	B	C	D	PESO WEIGHT	Con tubo / With hose		Staffa girevole Swivel bracket	Fermatubo Hose stopper	
	bar					mm					Kg
9201.0606	20	217				39	6x13 twin	13	9251		
9201.0808							8x15 twin	10			
9201.1010							10x17 twin	10			
9202.0606	20	285				46	6x13 twin	20	9252		
9202.0808							8x15 twin				
9202.1010							10x17 twin				
9202.1000							10x19 Single	30			
9203.0606	20	403				56	6x13 twin	30	9253		
9203.0808							8x15 twin				
9203.1010							10x17 twin				
9203.1310	20	403				56	13x23+10x19	21			
9203.1300	20	403				56	13x23 single	28			
9204.1310	20	403				66	13x23+10x19	30			

**TUBAZIONI IN GOMMA GEMELLATE PER GAS DI SALDATURA
RUBBER TWIN HOSE FOR WELDING GAS**

DIN 8541 - ISO 3821	TIPO TYPE mm	PRESSIONE PRESSURE bar
	6x13 twin	20
	8x15 twin	
	10x17 twin	